

13.1 INTERFACE ALLOCATION

13.2 GENERAL

13.2.1 (Reserved)

13.2.2 Approved Connectors for Cargo Element Use

All cargo element electrical connectors and connector contacts that interface with the Orbiter shall be selected from the following NASA and Rockwell International specifications, as applicable.

NASA

- 40M38277
- 40M39569
- 40M38298


Rockwell International

- ME414-0234
- ME414-0235
- ME414-0610
- ME414-0611
- ME414-0612
- ME414-0247
- ME414-0250
- MC414-0614
- ME418-0031
- ME418-0032

13.2.3 (Reserved)

13.2.4 Coding Used in Tables

In the detail connector/pin assignment tables under the column headed "CABLE DESC", the following coding has been used:

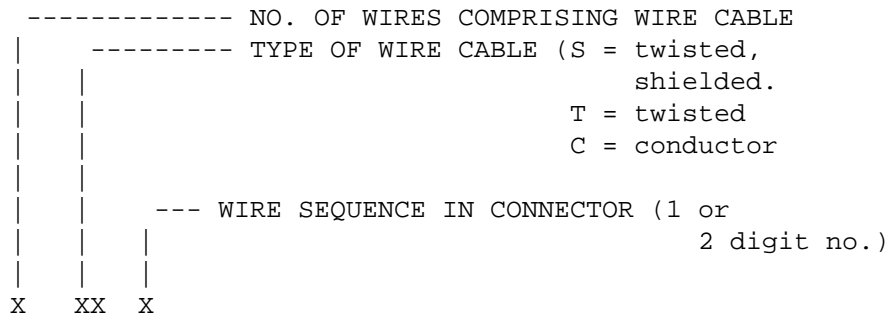

(e.g., 2S1 is the first shielded pair at the subject connector.)

13.3 (Reserved)

13.4 (Reserved)

13.5 (Reserved)

13.6 (Reserved)

THIS PAGE INTENTIONALLY LEFT BLANK